



# 文字高100mm 7セグメントLED数字表示器（アノードコモン）

|        |                            |
|--------|----------------------------|
| 電源電圧   | DC24V±5V                   |
| 最大消費電流 | 1 セグメント : 60mA<br>D.P : 無し |
| 保存温度   | -20~70℃                    |
| 動作温度   | -10~50℃                    |
| 湿度     | 10~85%                     |

正面図






背面図

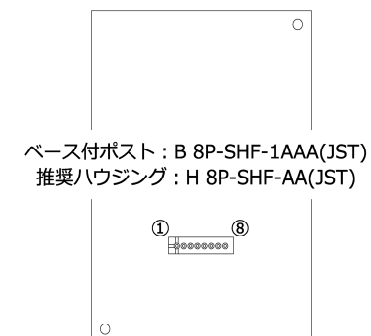

ベース付ポスト : B 8P-SHF-1AAA(JST)  
推奨ハウジング : H 8P-SHF-AA(JST)

- ① : COM
- ② : セグメントg
- ③ : セグメントf
- ④ : セグメントe
- ⑤ : セグメントd
- ⑥ : セグメントc
- ⑦ : セグメントb
- ⑧ : セグメントa


制限抵抗は必要ありません

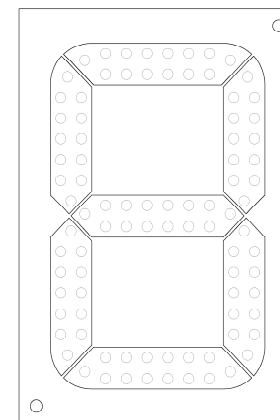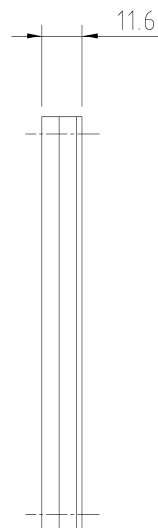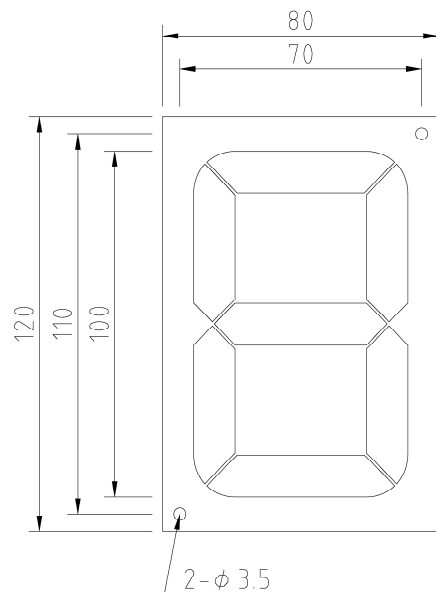

JNR1M10011A-3

側面図

JNR1M10011O-3



JNR1M10011A-3




JNA1M10011A-3




JNG1M10011A-3




JNB1M10011A-3




JNW1M10011A-3




JNY1M10011A-3




JNR1M10011O-3



JNA1M10011O-3



JNG1M10011O-3



JNB1M10011O-3



JNW1M10011O-3



JNY1M10011O-3